



IMPORTANT - PLEASE READ

a) This product **MUST BE EARTHED** in accordance with the current IEE wiring regulations, where appropriate.

b) Do not fit onto recently plastered walls.

c) Read the general instruction procedure before commencing installation.

d) If unsure of the installation please consult a skilled person (electrically).

e) **CLEANING:** polish only with a soft clean dry cloth. **USE NO FLUID.**

GENERAL INSTALLATION/ CONNECTION PROCEDURE

1) Isolate mains supply from existing accessory by switching off the appropriate circuit at the consumer unit.

2) Remove retaining screws and carefully withdraw accessory from wall box to reveal connections at the rear.

Wiring colour codes

Live = Brown or Red

Neutral = Black or Blue

Earth = Green / Yellow

3) Disconnect all cables noting their respective connections.

4) Connect accessory with reference to diagrams shown for each accessory.

5) Check all connections thoroughly.

6) Fix accessory to the wall box by using the two screws provided taking care not to trap any of the cables.


7) If wall decorations are complete then clip on decorative face plate (screwless accessories only). If decoration is still to be done then store face plate until completion.

8) Switch on mains supply at the consumer unit and check operation of accessory.


DISCLAIMER

This accessory must be installed in accordance with these fitting instructions. It should be fixed in the approved and conventional way to a solid or stud partition wall. Wallpaper/ wallpaper paste of any sort should not continue beneath the plate towards the working parts of the accessory. It should not be used in areas of high humidity (bathrooms etc.) nor within reach of a water source. The accessory should be connected to a mains supply of the appropriate voltage (indicated on the product.) Care should be taken not to overload the accessory (maximum wattage indicated on the product/packaging.) If you are unsure consult a skilled person (electrically) before fitting. No liability can be accepted if the product is installed or used in any other way.


1 WAY SWITCH




2 WAY SWITCH

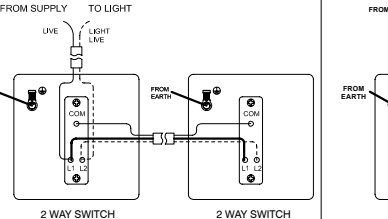


INTERMEDIATE SWITCH

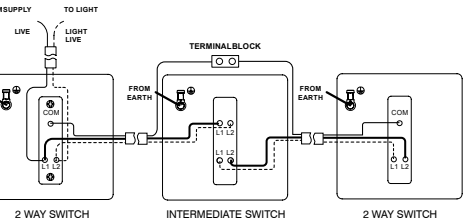


13A 1 GANG SWITCHED SOCKET




13A 2 GANG SWITCHED SOCKET



5A 1 GANG SWITCHED SOCKET




13A 1 GANG SOCKET WITH USB OUTLET



IN1075/1


m2electrical.co.uk

13A 2 GANG SOCKET WITH USB OUTLET




M2, Pipers Road, Park Farm Industrial Estate, Redditch, Worcestershire. B98 0HU.


FUSE CONNECTION UNIT




SWITCHED FUSE CONNECTION UNIT




20A SWITCH




45A SWITCH




COOKER CONTROL UNIT



DIMMER SWITCH/ FAN CONTROLLER




TV SOCKET




BT SOCKET

Normally a maximum of 5 telephones can be connected to one exchange line. Any sockets are connected in parallel, i.e. Pin 1 to Pin 1; Pin 2 to Pin 2: etc.




Colour Code
Pin Colour
1 Green or Green/White
2 Blue Or Blue/White
3 Orange or Orange/White
4 White or White/Orange
5 White or White/Blue
6 White or White/Green


SHAVER SOCKET




FAN ISOLATION SWITCH




32A KEYCARD SWITCH




10AX KEY SWITCH




13A 1 GANG DP LOCKABLE SOCKET



50A CEILING SWITCH



13A 2 GANG SOCKET WITH DUAL USB (A+C) QC/PD



GUARANTEE
(Applies to UK & Irish Republic)
This accessory is guaranteed against faulty workmanship or materials, provided that:
a) The accessory has not been overloaded or connect to a supply other than 230/240 V 50Hz.
b) The installation procedure has been carried out correctly
c) The bill of sale (dated) accompanies the accessory for repair or replacement.
d) The accessory has not been dismantled or modified in anyway.

This guarantee does not effect the statutory right of the consumer. In no circumstances can the company accept responsibility for any loss or damage said to arise from the use of this product.

WARNING
Do not use on freshly plastered walls as this may cause the plate to tarnish.

ENVIRONMENTAL PROTECTION
Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist.

Check with your local authority or retailer for recycling advice.

