



IMPORTANT - PLEASE READ

a) This product **MUST BE EARTHED** in accordance with the current IEE wiring regulations, where appropriate.

b) Do not fit onto recently plastered walls.

c) Read the general instruction procedure before commencing installation.

d) If unsure of the installation please consult a skilled person (electrically).

e) **CLEANING:** polish only with a soft clean dry cloth. **USE NO FLUID.**

If replacing an existing accessory check that the existing wall box has sufficient depth for your new product. A minimum wall box depth of 25mm is required for these grid modules.

GENERAL INSTALLATION/CONNECTION PROCEDURE

1) Isolate mains supply from existing accessory by switching off the appropriate circuit at the consumer unit.

2) Remove retaining screws and carefully withdraw accessory from wall box to reveal connections at the rear.

Wiring colour codes

Live = Brown or Red

Neutral = Blue or Black

Earth = Green / Yellow

3) Disconnect all cables noting their respective connections.

4) Unpack your new M2 accessory.

5) Connect accessory with reference to diagrams shown for each accessory.


6) Check all connections thoroughly.

7) Fix interior mechanism to the wall box by using the two screws provided taking care not to trap any of the cables.


8) If wall decorations are complete then fix on face plate. If decoration is still to be done then store face plate until completion.

9) Switch on mains supply at the consumer unit and check operation of accessory.


GRID PLATE PARTS

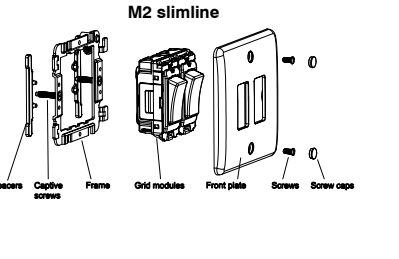

M2 metal

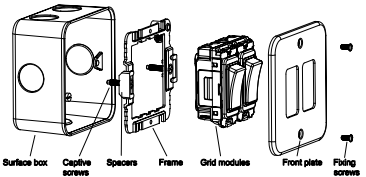

M2 screwless

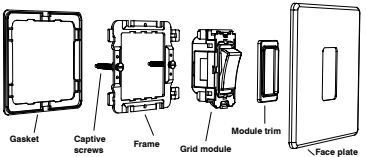

DISCLAIMER

This accessory must be installed in accordance with these fitting instructions. It should be fixed in the approved and conventional way to a solid or stud partition wall. Wallpaper/wallpaper paste of any sort should not continue beneath the plate towards the working parts of the accessory. It should not be used in areas of high humidity (bathrooms etc.) nor within reach of a water source.

The accessory should be connected to a mains supply of the appropriate voltage (indicated on the product.) Care should be taken not to overload the accessory (maximum wattage indicated on the product/packaging.) If you are unsure consult a skilled person (electrically) before fitting. No liability can be accepted if the product is installed or used in any other way.

GUARANTEE

(Applies to U.K & Irish Republic)
This accessory is guaranteed against faulty workmanship or materials, provided that:-
a) The accessory has not been overloaded or connect to a supply other than 230/240 V 50Hz.
b) The installation procedure has been carried out correctly
c) The bill of sale (dated) accompanies the accessory for repair or replacement.
d) The accessory has not been dismantled or modified in anyway.

This guarantee does not effect the statutory right of the consumer. In no circumstances can the company accept responsibility for any loss or damage said to arise from the use of this product.

WARNING

Do not use on freshly plastered walls as this may cause the plate to tarnish.


ENVIRONMENTAL PROTECTION

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist.


Check with your local authority or retailer for recycling advice.




1 WAY SWITCHING




2 WAY SWITCH
(ON 1 SWITCH)




DOUBLE POLE SWITCH




2 WAY SWITCH
(ON REMOTE SWITCH)




2 WAY SWITCH




INTERMEDIATE SWITCH




2 WAY SWITCH




FAN ISOLATOR



FUSE



2 WAY SWITCH
(ON 1 SWITCH)



DIMMER

